

PRO SERIES

| | \$2 6 6 6 4 - 6 6 4 6 6 8 4 6 6 4 6 6 6 6 4 8 4 8 6 | | | |
|---|---|--|--|--|
| AUXT AUXQ AUXA EXT STATE BUTTOM REAGERT | а а а а а а а а а а а а а а | | | |
| | | | | |
| | | | | |
| | RS465 CARD RUN POWER | | | |
| (inBIO Pro | Advanced Access Control | | | |
| | | | | |
| | | | | |
| LAN SWITCH PC AUXOUTI AUXOUTI AUXOUTI AUXOUTI AUXOUTI AUXOUTI AUXOUTI | //4 LOOK1 LOOK2 LOOK3 LOOK4 LOOK POWER 또 응 운 곳 등 또 등 옷 등 및 통 옷 및 통 옷 등 및 통 옷 등 및 등 등 한 등 | | | |
| 300 512 525 555 555 555 555 555 555 555 555 | | | | |
| | | | | |
| inBio 460-PRO | | | | |
| | | | | |
| AT NO OF FOR A ROAD BOOK AND SOON AND SOON AND | AN OF THE ATTA HOME HOME | | | |
| ZKTECO - 100 - 100 - 10 - 100 | | | | |
| (InBIO Pro | (InBIO Pro | | | |
| 00 0010 N 0007 0007 000 000 000 000 | N MMM 10007 100 FMM | | | |
| tel als als statistics and an | un mense filfsfriftfiri.ift Det Des Desse | | | |
| | | | | |
| inBio 260-PRO | inBio 160-PRO | | | |

inBio Pro-Series IP-Based Access Control Panel

inBio Pro Series is a next-generation series of fingerprint & card-matching panels having advanced access control features including anti-passback, first-card opening, multi-card opening, duress password entry, embedded card verification and supports real-time Push protocol.



Choice of Readers:

For fingerprint-matching, select only ZKAccess FR-Series slave fingerprint readers.

Full range of prox card readers supported. ZKAccess KR-Series slave card readers are stylish and waterproof. inBio Pro supports any wiegand-output reader, including HID Prox, iClass, and XceedID Multi-Technology.



Communication:

inBio Pro panels install easily on your network and support both TCP/IP and RS-485 communication. Auto-discovery tool allows setting and modication of network parameters directly and easily.



Lowest Total Cost of Ownership:

inBio Pro panel firmware can be upgraded in the field. New controller features can be loaded without any advanced tools, extending and expanding the value of your investment.



Built-In Advanced Access Control:

Anti-Passback, First-Card Opening, Multi-Card Opening, Duress Password Entry, and Auxilary Input/Output Linkages are built into the firmware.



Door Control and More:

Along with relay contacts for controlling door locks, easily programmable auxilary relays can be used for additional control and interface to lights, alarms, annunciators, intrusion detection panels, or even extra locking devices or gate controllers.

Options:

inBio Pro panels come in three sizes to suit project needs and reduce the cost of unused capacity. 1-door, 2-door, and 4-door models can be mixed and matched in an optimized system architecture.



Capacity:

20,000 fingerprints and 30,000 card holders. Panel is backed up in real-time in on-board optional SD card. Data is preserved if power is lost. Panel continues to operate even if network connection is interrupted.


For Software Developers:



Free SDK is available for integrators and OEM's to integrate the inBio Pro panels with their existing security or personnel management applications.

Upon request, ZKAccess can also customize inBio Pro firmware to meet any custom requirements.

Typical Installation

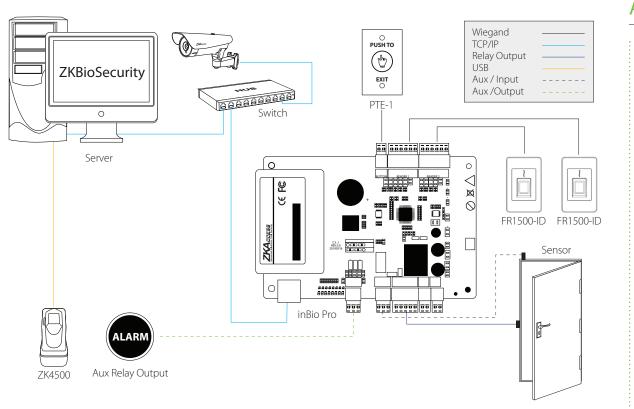

Specification

| | inBio 160-PRO | inBio 260-PRO | inBio 460-PRO |
|-----------------------------|--|--|--|
| Software Compatibility | ZKBioSecurity software, only | ZKBioSecurity software, only | ZKBioSecurity software, only |
| Number of Doors Controlled | 1 Door | 2 Door | 4 Door |
| Number of Readers Supported | 4 (2 RS-485 readers and 2 Wiegand readers) | 8 (4 RS-485 readers and 4 Wiegand readers) | 12 (8 RS-485 readers and 4 Wiegand readers) |
| Types of Readers Supported | 26-bit Wiegand, others upon request | 26-bit Wiegand, others upon request | 26-bit Wiegand, others upon request |
| Number of Inputs | 3 (1 for Exit button, 1 for Door status, 1 for Aux) | 6 (2 for Exit button, 2 for Door status, 2 for Aux) | 12 (4 for Exit button, 4 for Door status, 4 for Aux) |
| Number of Outputs | 2 (1-from C Relay for Lock and 1-form C Relay for Aux Output) | 4 (2-from C Relay for Lock and 2-form C Relay for Aux Output) | 8 (4-from C Relay for Lock and 2-form C Relay for Aux Output) |
| Capacity | 20,000 fingerprints / 30,000 card holders | 20,000 fingerprints / 30,000 card holders | 20,000 fingerprints / 30,000 card holders |
| Log Events Capacity | 100,000 | 100,000 | 100,000 |
| Weight | 9 lbs (4.08 kg) | 10 lbs (4.5 kg) | 10 lbs (4.5 kg) |
| Communication | TCP/IP | TCP/IP | TCP/IP |
| Enclosure | Powder Coated Aluminium | Powder Coated Aluminium | Powder Coated Aluminium |
| Mounting | Wall Mount or DIN rail | Wall Mount or DIN rail | Wall Mount or DIN rail |
| Recommended Power Supply | 12V DC, 1.5A | 12V DC, 1.5A | 12V DC, 1.5A |
| Dimensions | 7.5 x 5.5 inches (190 x 140 mm) | 7.5 x 5.5 inches (190 x 140 mm) | 9 x 5.5 inches (229 x 140 mm) |

Optional Accessories



FR1500-ID





KR502H



Prox Card





ZKAccess

6 Kingsbridge Road, Unit 8, Fairfield, NJ 07004 Phone: (862) 505-2101 • Fax: (862) 204-5906 • sales@zkaccess.com • www.zkaccess.com

© Copyright 2016. ZKTeco Inc. ZKTeco Logo and ZKAccess Logo are registered trademarks of ZKTeco or a related company. All other product and company names mentioned are used for identification purposes only and may be the trademarks of their respective owners. All specifications are subject to change without notice. All rights reserved.

